80t TELESCOPIC SPREADER BEAM





DESCRIPTION

Tare Weight: 605kg (excluding shackles or associated rigging gear)

Lifting Lugs (top) suit: 55.0 tonne Grade 'S' safety bow shackle

Load Lugs (lower) suit: 55.0 tonne Grade 'S' safety bow shackle

Centre Lug suit: 12.0 tonne Grade 'S' safety bow shackle


PRODUCT ASSURANCE

Proof Load Testing Yes

MPI Weld Inspection Yes

Manufacturer's Guarantee 1 Year

Span	WLL (tonnes)				Approx Sling Leg Length (Mtrs)			Approx Headroom (Mtrs)		
(Metres)	60 °	90°	120 °	CENTRE LIFT	60°	90 °	120 °	60°	90 °	120 °
4.0	80.0	70.0	40.0	9.0	4.0	2.8	2.3	3.5	2.0	1.2
4.5	80.0	70.0	40.0	8.0	4.5	3.2	2.6	3.9	2.3	1.3
5.0	80.0	70.0	40.0	7.0	5.0	3.5	2.9	4.3	2.5	1.4
5.5	80.0	70.0	40.0	6.0	5.5	3.9	3.2	4.8	2.8	1.6
6.0	80.0	70.0	40.0	5.0	6.0	4.2	3.5	5.2	3.0	1.7

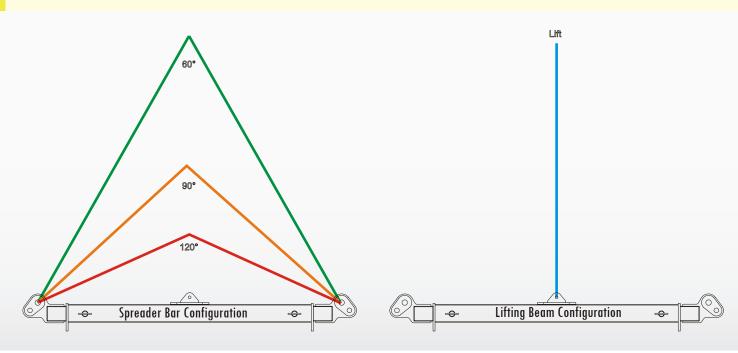



WE PROVIDE SUPERIOR QUALITY LIFTING PRODUCTS AUSTRALIA WIDE

All Maxirig products are designed and manufactured in Australia by our highly skilled team of engineers and boilermakers.