

Grade 100 Oblong Master Links & -Assemblies with new ratings!



TWN 1801 **New**


Article-No.	Working Load Limit (WLL) [t max.]	Dimensions			Weight app. [kgs]	Trade Size	
		D [mm]	T [mm]	B [mm]		1-Leg	2-Leg
F1801013	3,3	13	90	50	0,3	7-10/XL	6-10/XL
F1801016	5,1	16	110	60	0,53	8-10/XL	7-10/XL
F1801018	6,2	18	130	70	0,8	10-10/XL	8-10/XL
F1801020	7,5	20	140	80	1,1	-	-
F1801022	8,8	22	160	90	1,5	13-10/XL	10-10/XL
F1801026	13,1	26	180	100	2,3	16-10/XL	13-10/XL
F1801032	19,6	32	230	125	4,4	20-10/XL	16-10/XL
F1801036	25	36	250	140	6,2	-	-
F1801040	30	40	290	160	8,8	22-10/XL	20-10/XL
F1801045	39	45	320	175	12	26-10/XL	22-10/XL
F1801050	49,3	50	340	190	16	32-10/XL	26-10/XL
F1801056	62,7	56	380	210	23	-	-
F1801063	78,2	63	430	240	33	-	32-10/XL
F1801070	99	70	470	260	44	-	-



Acc. to AS 3775 and AS 3776, SF 1: 2 : 4. Blue powder coated (RAL 5002).

TWN 1802 **New**

Article-No.	Working Load Limit (WLL) [t max.]	Dimensions							Weight app. [kgs]	Trade Size 3-/4-Leg
		E [mm]	D [mm]	T [mm]	B [mm]	D ₁ [mm]	T ₁ [mm]	B ₁ [mm]		
F1802016	5	170	16	110	60	13	60	30	0,94	6-10/XL
F1802020	7,5	210	20	140	80	16	70	35	1,8	8-10/XL
F1802026	13,2	270	26	180	100	20	90	45	3,8	10-10/XL
F1802032	19	350	32	230	125	26	120	60	7,7	13-10/XL
F1802040	25	420	40	290	160	28	130	65	13	16-10/XL
F1802050	42,5	500	50	340	190	36	160	80	25	20-10/XL
F1802050A	47,5	520	50	340	190	40	180	90	28	22-10/XL
F1802063	67	630	63	430	240	45	200	100	49	26-10/XL
F1802080	85	740	80	520	290	50	220	110	86	32-10/XL

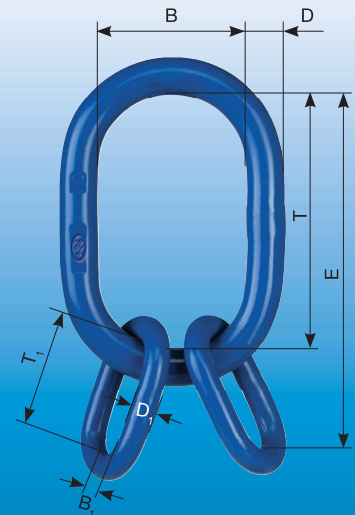

Acc. to AS 3775 and AS 3776, SF 1: 2 : 4. Blue powder coated (RAL 5002).

